

### POINT 92 Polystyrene adhesive




Point 92 is a one-component, water-based adhesive based on acrylic dispersion for gluing elements made of foam to porous surfaces such as concrete, gypsum, cement, bricks, particle board and cardboard. Once hardened, the adhesive forms a very white and extremely durable seam.

#### Advantages

- Frost resistant after hardening.
- High adhesion force after hardening 25 kg / cm<sup>2</sup>
- Forms a white seam.
- Odorless, solvent free.
- Non-flammable.
- Elastic seam.

#### Perfect adhesion with:

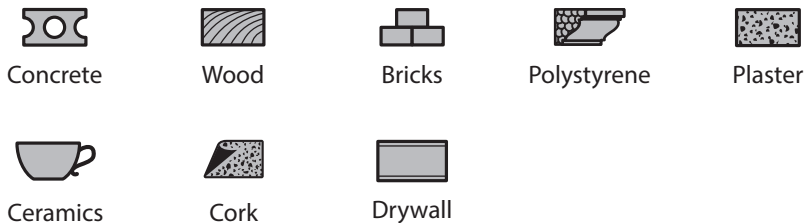

#### Areas of application

- Bonding of thermal and acoustic insulation materials.
- Bonding of mineral and stone wool.
- Bonding of decorative panels and baseboards made of polystyrene.

## TECHNICAL DATA SHEET

### Technical Specifications

Indicator	Value
Color	white
Base material	Acrylic dispersion
Density (ISO 2811-1)	1.5 g/ml
Temperature resistance after hardening	-20 °C ... +60 °C
Working environment temperature	+10 °C ... +30 °C
Correction time	10-15 min.
Full harding time	48 hours
Tensile strength (adhesion force) (DIN 53504 S2)	25 kg/cm <sup>2</sup>
Dry balance	75%
Consumption	200-400 g/m <sup>2</sup>
Capacity	280 ml

### Users manual

All surfaces must be free of dust, dry, clean, free of grease and oil. Cut off the end of the cartridge tip and screw the nozzle included in the kit onto it. Insert the cartridge into the syringe gun and fill the nozzle with glue by pressing the trigger on the gun several times. Apply adhesive strips or dots to any adhesive surface. Join the surfaces to be glued and press firmly. The correction time after use is 10-15 minutes. Application temperature +10 °C ... +30 °C.

### Limitations

- Do not use on PE, PP, Teflon and bituminous surfaces.
- At least one of the surfaces must be absorbent.
- Protect from water until fully cured.

### Packaging

280 ml plastic cartridge, in a box of 12 cartridges.

### Storage conditions

Warranty shelf life - 24 months from the date of manufacture, if stored in the closed original packaging in a dry and cool place from +5 °C to +30 °C.

### Safety instructions

The safety data sheets of the product must be read before use. Safety data sheets are available upon request from official distributors.

### Waste management

Completely empty the package and dispose of as required.