



POINT 98


All season express glue

All-season, ultra-fast and strong synthetic-based adhesives suitable for many construction and finishing jobs. Colour - beige. Commonly used for gluing baseboards, thresholds, various panels, ceramic tiles and decorative elements made of wood, plaster, cork MDF and OSB. Excellent adhesion with bricks, ceramics, plywood, wood and hard plastic. Extremely high tensile strength (adhesion force) - 40 kg / cm².

Advantages

- Suitable for all seasons. Operating temperature from -20 °C to +30 °C.
- Very strong and fast initial adhesion.
- Extremely high adhesion force: 40 kg / cm².
- Excellent adhesion to porous and non-porous surfaces.
- Glues immediately, no need to separate and wait.
- Resistant to cold and moisture after hardening.
- Suitable for outdoor and indoor work.

Perfect adhesion with:

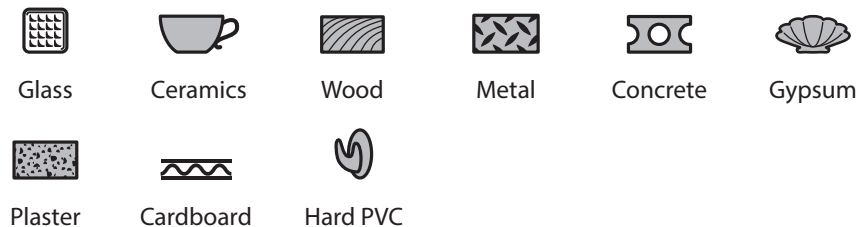

Areas of application

Bonding of various finishing materials to typical surfaces, such as concrete, particle board, wood, brick. Bonding of baseboards, plinths, thresholds, slabs, ceramic tiles.

Used for gluing building materials such as bricks, ceramics, plywood, wood products, all types of plastic (except PP and PE). Suitable for gluing decorative elements from wood, plaster, cork, particle board, ceramic.

Not suitable for use

Do not use, PE, PP, Teflon.

Do not use for gluing mirrors.

Not suitable for gluing polystyrene foam and other solvent-sensitive surfaces.

TECHNICAL DATA SHEET

Technical Specifications

Indicator	Value
Colour	beige
Base material	synthetic rubber
Tensile strength (adhesion force)	40 kg / cm ²
Density	1.18 g / ml
Gluing time (@ +23 °C/50% RH)	5-7 min
Full hardening time (@ +23 °C/50% RH)	73 h
Thermal resistance after hardening	-20 °C ... +60 °C
Working environment temperature	-20 °C ... +30 °C
Yield seam	10 m
Consumption	300/500 g/m ³
Full hardening	48 h
Capacity	280 ml

Users manual

All surfaces must be free of dust, clean, free of grease and oil. Cut off the end of the cartridge tip and screw the nozzle included in the kit onto it. Insert the cartridge into the syringe gun and fill the nozzle with glue by pressing the trigger of the gun several times. Squeeze the glue on one of the surfaces to be glued with strips or dots. Press the surfaces to be glued together. Operating temperature from -20 °C to +30 °C. Residues of adhesive can be wiped off with a cloth or tissue. The pellice forms in 7 minutes. Fully hardens in 48-72 hours. Yield 300-500 g/m². Suitable for outdoor and indoor work. Temperature resistance after hardening -20 °C ... +60 °C.

Packaging

280 ml plastic cartridge, in a box of 12 cartridges.

Storage conditions

Store unopened in a dry place at a temperature of +5 °C to +25 °C. Shelf life - 18 months from production dates in accordance with the storage rules.

Safety instructions

The safety data sheets of the product must be read before use. Safety data sheets are available upon request from official distributors.

Waste management

Completely empty the package and dispose of as required.